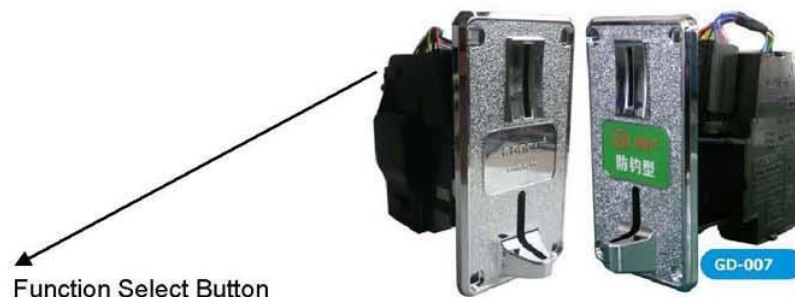



GDY007 - Coin Acceptor Module

Product	GD007 Intelligent Coin Validator
Specification	Input Voltage: DC+12V±20% Work Temperature: -15℃~+75℃ Output: Pulse
Coin acceptance	1 coin acceptance: 10.8mm -31mm in Coin diameter :1.2mm-3.0mm in thickness
Box Package	50PCS/BOX G.W.12.5KG N.W. 12KG SIZE. 73*37*30CM
Single Package	0.25KG/PC-WEIGHT 15.5*13*7CM/PC

Product View


Function Select Button

Operation	<p>1.Press the function selector button when light on, insert and drop the coin that need to accepted 30 times to program the coin. When light off,it is ok.</p> <p>2.Sensitive switch :Strict,Norma,Slack. Norma is default setting. If coin reject, Slack could be selected</p> <p>3.Coin signal time for different machine.Fast: 20ms/short pulse signal Medium: 40ms/medium pulse signal Slow: 60ms/long pulse signal</p>
------------------	---

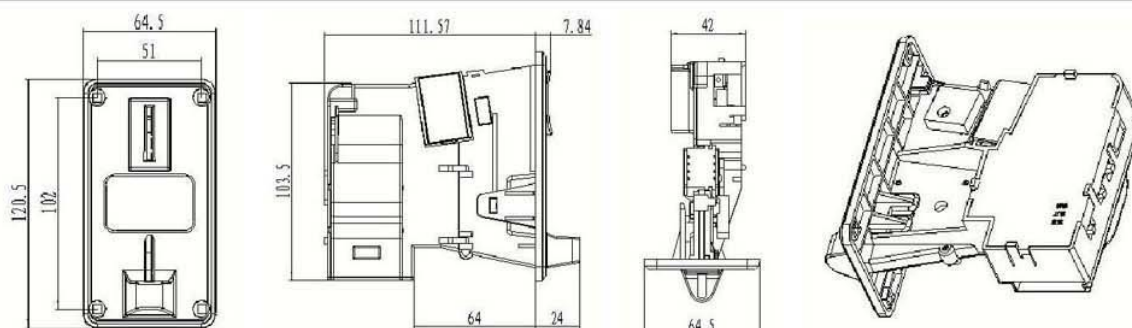


Cable Interface	<ol style="list-style-type: none"> 1. Gray line— Counter 2. Black line— GND 3. White line—Coin signal 4. Red line— DC+12V
------------------------	---



History	1996 into market,15 years long history model,Elite model
Application	Vending machine,gaming machine,jukebox,coinbox,cyber café,arcade crane,etc.
Standard	European standard
OEM	Accepted


GDY007 - Coin Acceptor Module

Product	GD007 Intelligent Coin Validator
Specification	Input Voltage: DC+12V±20% Work Temperature: -15℃~+75℃ Output: Pulse
Coin acceptance	1 coin acceptance: 10.8mm -31mm in Coin diameter :1.2mm-3.0mm in thickness
Box Package	50PCS/BOX G.W.12.5KG N.W. 12KG SIZE. 73*37*30CM
Single Package	0.25KG/PC-WEIGHT 15.5*13*7CM/PC

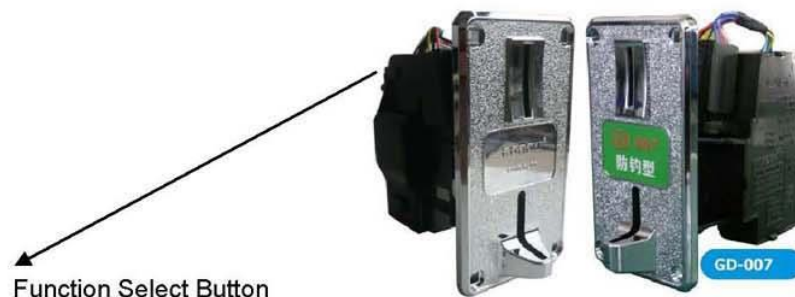Product View


Function Select Button

Operation	<p>1.Press the function selector button when light on, insert and drop the coin that need to accepted 30 times to program the coin. When light off,it is ok.</p> <p>2.Sensitive switch :Strict,Norma,Slack. Norma is default setting. If coin reject, Slack could be selected</p> <p>3.Coin signal time for different machine.Fast: 20ms/short pulse signal Medium: 40ms/medium pulse signal Slow: 60ms/long pulse signal</p>
------------------	---

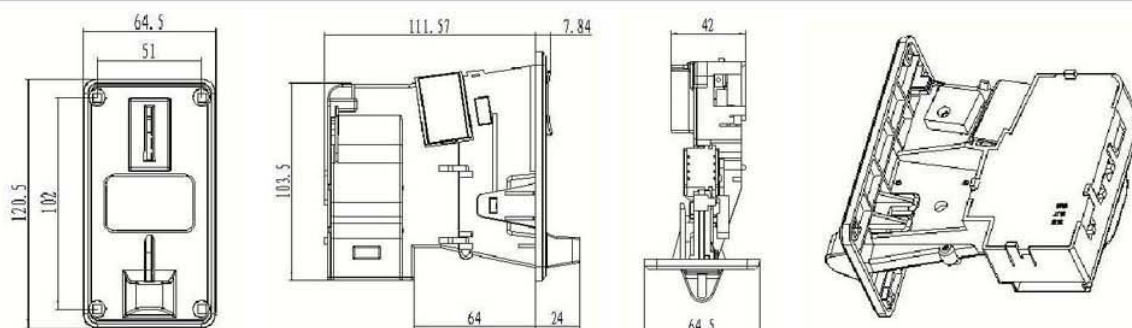

Cable Interface	<ol style="list-style-type: none"> 1. Gray line— Counter 2. Black line— GND 3. White line—Coin signal 4. Red line— DC+12V
------------------------	---



History	1996 into market,15 years long history model,Elite model
Application	Vending machine,gaming machine,jukebox,coinbox,cyber café,arcade crane,etc.
Standard	European standard
OEM	Accepted


GDY007 - Coin Acceptor Module



1st step: plug 12v & Gnd



2nd step: press program button until LED red

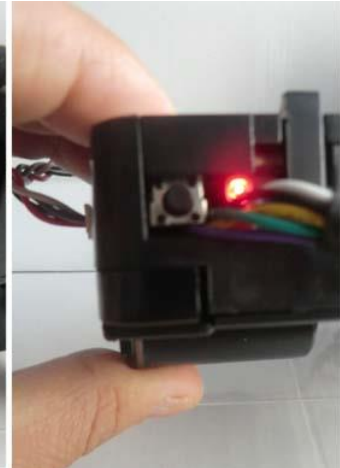

3rd step: drop coin 30 times until LED off 4th step: normal operation

LET'S MAKE IT